

# Un Profileur Acoustique Miniature à Haute Résolution dédié à la Surveillance Environnementale

Marie BURCKBUCHLER<sup>1</sup>, Stéphane FISCHER<sup>1</sup>

<sup>1</sup> Ubertone – 11 rue de l'Académie 67000 Strasbourg – stephane.fischer@ubertone.fr

*Une nouvelle électronique de profileur acoustique a été développée par Ubertone pour des applications de basse consommation et à haute résolution. Avec ce développement, les limites technologiques des UVP (Ultrasonic Velocity Profiler) ont été repoussées pour obtenir un circuit plus léger et plus petit. L'électronique consomme moins et se met en marche très rapidement. La communication se fait par protocole Modbus via RS485. En réalisant une comparaison avec un UVP de référence, des capacités très proches en termes de résolution et de niveau de bruit ont été observées. La haute résolution spatiale de la nouvelle électronique est mise en évidence par les résultats de chaque expérience menée. La haute résolution temporelle permet de récolter une grande quantité de données lorsque l'on se déplace sur le transect d'un canal ou d'une rivière. Les premières mesures en environnement naturel sont très prometteuses. Sur une rivière de 2 m de profondeur, l'appareil a permis de mesurer un profil de vitesse sur une section de profondeur 1.5 m avec une résolution verticale de 2 cm. La détection de fond donne de bons résultats. L'ambiguïté distance-vitesse a été optimisée en décalant la vitesse minimale. Les échos secondaires ont pu être filtrés grâce à la méthode de codage en phase. L'assistant web d'Ubertone simplifie la visualisation et le post-traitement des données récoltées.*

**Mots-clefs :** Instrumentation, Ecoulements naturels, Mesure à haute résolution de champs de vitesse, Surveillance de champ de vitesse.

## A High Resolution Miniature UVP Applied To Environmental Monitoring

*A new hardware has been developed by Ubertone for low power and high resolution applications. This new development pushes further the technological limits of UVP (Ultrasonic Velocity Profiler) to reach a lighter and smaller board. The electronics consume less and power up very quickly. The device communicates through Modbus protocol over RS485. The comparison with a reference UVP proved that the velocity measurement have the same accuracy and comparable noise level. The high spatial resolution was highlighted by the results of each experiment. The high time resolution provides a great amount of data when moving along a transect of a flume or a river. The first measurements on river are promising for environmental applications. On a 2 m deep river, the device provided a velocity profile over 1.50 m deep section with 2 cm vertical resolution and the bottom tracking showed good results. The range-velocity ambiguity was optimized by shifting the minimum velocity. The ghost echoes could be filtered thanks to the phase coding method. The Web Assistant of Ubertone simplifies the data visualisation and post-processing.*

**Key words:** Instrumentation, Environmental flows, high resolution velocity mapping, Flow field monitoring.

## I INTRODUCTION

The UVP (Ultrasonic Velocity Profiler) technique has been introduced to Fluid Mechanics in [Takeda, 1986]. This technique based on coherent Doppler allows to measure velocity profiles with a high spatial and temporal resolution. Since then, many researchers have shown promising applications, especially in flow metering, rheometry, flow mapping and environmental flow studies [Hurther et al. 2002]. [Kojima, 2006] have shown the possibility to measure a velocity field with a UVP unit, but the device weights 10 kg and needs to be attached to a computer and to the power grid. Indeed, robustness and power consumption are two major obstacles for environmental application of UVP. On the other side, the ADCP technique is dedicated to long range measurement using long coded pulses inducing a low spatial resolution as shown in [Brumley, 1991]. But ADCP devices are designed to fit for outdoor applications.

Ubertone has shown the possibility to embed a complete UVP in a single probe, the UB-Flow, allowing the measurements of high resolution velocity profiles in open channels and harsh environments [Fischer 2010; Fischer 2012]. This device can be considered as a high resolution ADCP (Acoustic Doppler Current Profiler) fitting particularly for shallow flows. On the other side UVP uses short pulses allowing to reach the millimetre resolution. The new device presented in this paper is based on the same UVP measurement principle. However, size, weight and power consumption were reduced. In this paper, the characteristics of the new device, as well as the first results on two flumes and an urban river are presented. The general purpose of all these experiments was to test the capabilities of the new hardware in different situations. This has been done by comparing it to a reference hardware, by measuring in artificial and natural environments, by applying different flow rates, and so on.

## II MATERIALS, EXPERIMENTS AND METHODS

### II.1 MINI UVP HARDWARE

The Mini UVP Hardware (see Fig. 1) is based on a completely new design, including innovation in the emitting circuit and the demodulation process. The signal processing was optimized for this new architecture and includes coherent Doppler estimation, automatic gain control, static echo filter, phase coding and blind zone compensation.



Figure 1. The new Mini UVP Hardware

This results in a much lighter, smaller and low power circuit that can drive two transducers, opening several application perspectives. Communication goes through Modbus protocol via RS485, which can be wired through USB directly on the computer. The user can access to many information as the velocity profile, SNR (signal-to-noise ratio) profile, echo profile, temperature, pitch and roll angles.

The main technical characteristics are given in Table 1.

Table 1. Main characteristics of the Mini UVP Hardware

POWER		ACOUSTIC		
Input	5V DC	Number of transducers	2	
Consumption	0.5 to 1W	Emitting frequency	400kHz to 3.6MHz	
Power up	0.6s	<b>PROFILING PERFORMANCES</b>		
<b>PHYSICAL</b>		Spatial resolution	down to 1-2mm (frequency dependent)	
Size	21 x 85mm	Number of cells	100	
Weight	14g	<b>EMBEDDED SENSORS</b>		
		Temperature	± 0.5°C	
		Pitch + Roll	± 0.5°	

### II.2 Experiments

Several experiments have shown the capabilities of this new hardware. Measurements have been done in the small flume at Ubertone's office, in the taller flume of ICube (Strasbourg, France) and in the Aar, a branch of the river Ill (Alsace, France). In this article, we present some experiments conducted in these three different environments:

- *In Ubertone's flume:*

The purpose of those measurements was to compare, in terms of noise and accuracy, the new hardware with an UVP device dedicated to laboratory measurements (UB-Lab).

The transducer was placed horizontally outside the small flume (8 x 30 x 200 cm), on the wall, with a Doppler angle  $\beta$  of 70° between the transducer axis and the flow axis (see Fig. 2 – a). Ultrasonic transmission gel was put between the transducer and the wall.

- *In ICube's flume:*

The purposes here were to compare velocity profiles for two flow rates and to evaluate the ability of the new hardware to measure moving over a transect.

Two 1MHz transducers were fixed on a floating board: one with a Doppler angle  $\beta$  of 97° for the bottom tracking, the other a Doppler angle  $\beta$  of 65° for the velocity measurement. They were connected to the Mini UVP Hardware, which was plugged on a Raspberry Pi board. A computer could communicate with it through Wi-Fi.

This flume is 15 m long and 60 cm large and on the left bottom corner of the flume there is a step of 20 x 20 cm all along the flume. Two types of measurements have been conducted on this flume:

- The board was floating in the flume and maintained at a position with a rope (see Fig 2 – b). Measurements have been done for two flow rates: about 266m<sup>3</sup>/h and about 436 m<sup>3</sup>/h, with water levels of respectively 43 and 50 cm.
- The board was pulled cm per cm perpendicularly to the stream, from one side to the other and staying 20 s immobile each time. The flow rate was set to 436 m<sup>3</sup>/h, leading to a water level of 50 cm.

- *In the Aar:*

To test the new hardware in natural environments, bathymetry and velocity profiles measurements over a transect of a river have been conducted.

The same board as on ICube's flume was used here. The board was floating on the Aar, a branch of the river Ill (Alsace, France). It was moved on the water surface along the transect with a rope (see Fig. 2 – c). As a consequence, the board was never completely immobile, the trajectory was not exactly straight-lined and the translation speed was approximated.

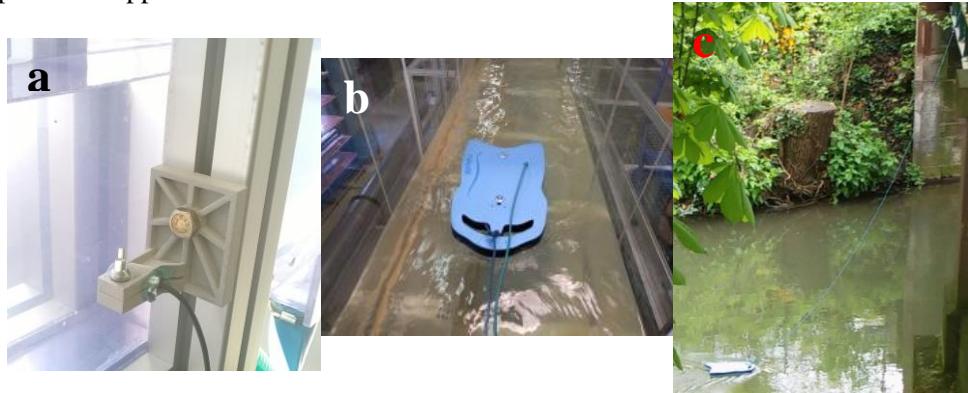


Figure 2. Measurement in Ubertone's flume (a), in ICube's flume (b) and in river Aar (c).

### II.3 METHOD

As it is not common to use the UVP technology in rivers, the setup of the device is a critical point in this environment. The configuration is mainly constrained by the velocity range. Indeed, the velocity range along the flow direction,  $R_v$ , is given by the pulse repetition frequency  $PRF$  and the emission frequency  $f_0$ :

$$2.f_0.R_v.\cos(\beta) = c.PRF \quad (1)$$

$c$  is the sound speed in the water. If the scatterer velocity exceeds  $R_v$ , a Nyquist jump occurs.

The fact is that the velocity range is a limiting factor of the exploration depth  $H_v$ :

$$H_v.R_v = c^2.\tan(\beta)/(4.f_0) \quad (2)$$

For example the velocity in river Aar reaches 50 to 100 cm/s where the measurements were done. Thus, the explorable depth for the velocity profile is limited in comparison to the river depth (~2 m). It is possible to set a parameter, the minimal measurable velocity, to shift the velocity range. Indeed, the default minimal measurable velocity is equal to  $-R_v/2$ , so the default velocity range is  $[-R_v/2; +R_v/2]$ . But measuring in the direction of the main flow in a flume for example allows to assume there are almost no negative velocities to measure. So putting the minimal measurable velocity to nearly zero is possible and allows thus to measure velocities up to  $+R_v$ .

One more limitation of the UVP technology is the bias induced by “ghost echoes”, i.e. echoes from a previous pulse. This is filtered thanks to the phase coding method which is part of a unique technological system devised by Ubertone.

Ubertone has developed a set of online tools that allow to visualize and post-process the raw data recorded from the device. The measurement data are stored in the cloud and can be immediately viewed and evaluated in ready to use and comprehensive plots. It is possible to display simple plots, like averages and time series, but also to make advanced processing, like interface detection. The post-processing of the data can be adapted to the site and to the conditions.

For all the following analysis, this web server has been used.

### III NEW UVP HARDWARE VS. EXISTING VELOCITY PROFILER

When comparing the new UVP Hardware with the UB-Lab, the results show that both devices have almost the same noise level, i.e. 2.5  $\mu$ V.

Moreover, the velocity profiles measured perpendicularly to the flow direction in Ubertone's flume with both devices are almost perfectly superimposed (Fig. 3) and give similar values of SNR. The velocity profile is typical of a turbulent flow between smooth walls. Details on the devices configuration are given in Tab. 2.

Table 2. Setup used for velocity measurement in the flume

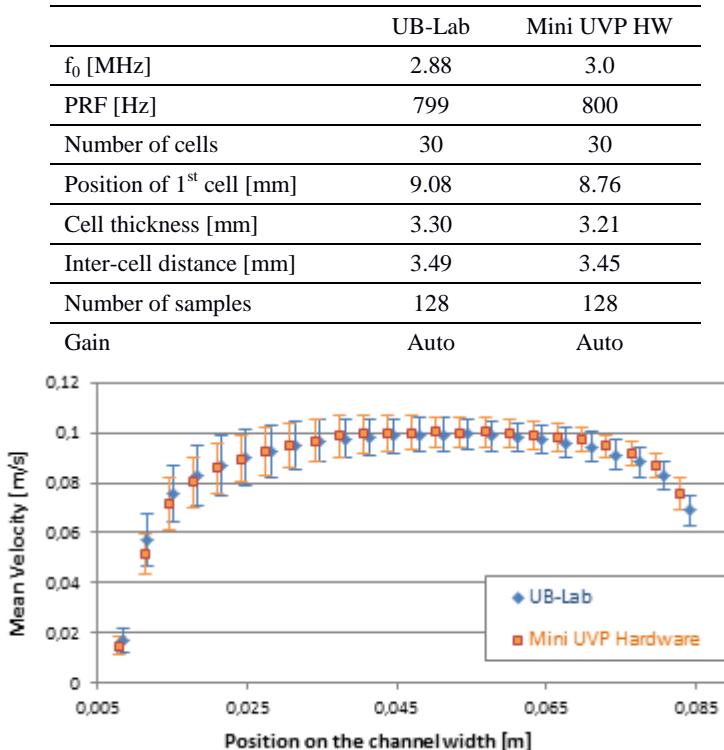


Figure 3. Horizontal velocity profiles in a rectangular flume. Velocity average and standard deviation over 40 seconds

### IV MINI UVP HARDWARE ON FLUME

For the measurements on ICube's flume presented here, the configurations given in Tab. 3 was used.

Table 3. ICube flume velocity measurement configuration

	Bottom tracking	Velocity
$f_0$ [MHz]	1	1
Doppler angle [ $^{\circ}$ ]	97	65
PRF [Hz]	300	600
Min measurable velocity [m/s]	-0.03	
Nyquist Range [m/s]	1.05	
Number of cells	100	100
Position of 1 <sup>st</sup> cell [mm]	9.27	9.64
Cell thickness [mm]	5.19	5.93
Inter-cell distance [mm]	5.93	5.93
Number of samples	50	128
Number of profiles	10	10
Gain	19.98dB	auto

## IV.1 VELOCITY PROFILES FOR TWO DIFFERENT FLOW RATES

The next two measurements have been done on the flume of the ICube Laboratory. Measuring the velocity profile with the 1MHz transducer floating on the water with a Doppler angle of  $65^\circ$ , we obtained regular good quality profiles for both flow rates (see Fig. 4).

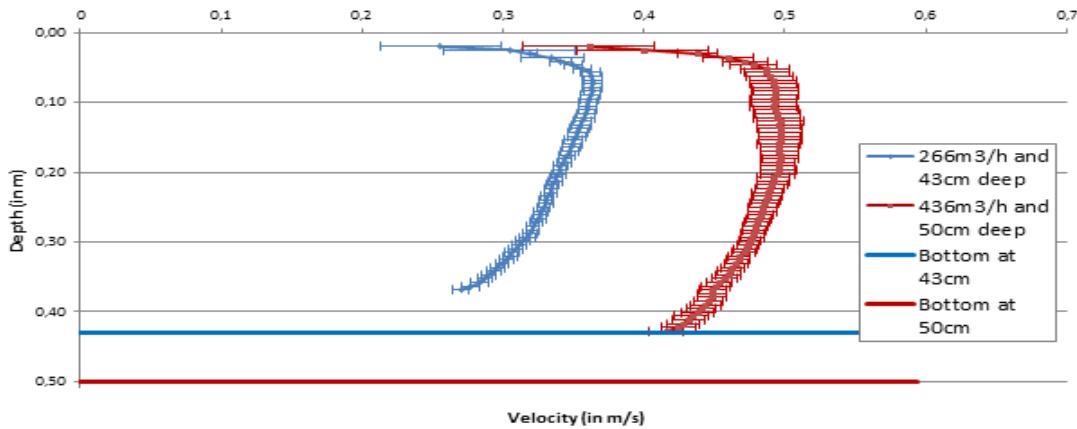


Figure 4. Average velocity profiles and standard deviation for two flow rates in the flume of ICube Laboratory

## IV.2 DATA ACQUISITION MOVING ALONG A TRANSECT ON THE FLUME

By pulling the board over the flume, the evolution of the echo profiles (with the  $97^\circ$  transducer), and of the SNR and velocity profiles (with the  $65^\circ$  transducer) could be observed (see Fig. 5, resp. a, b and c).

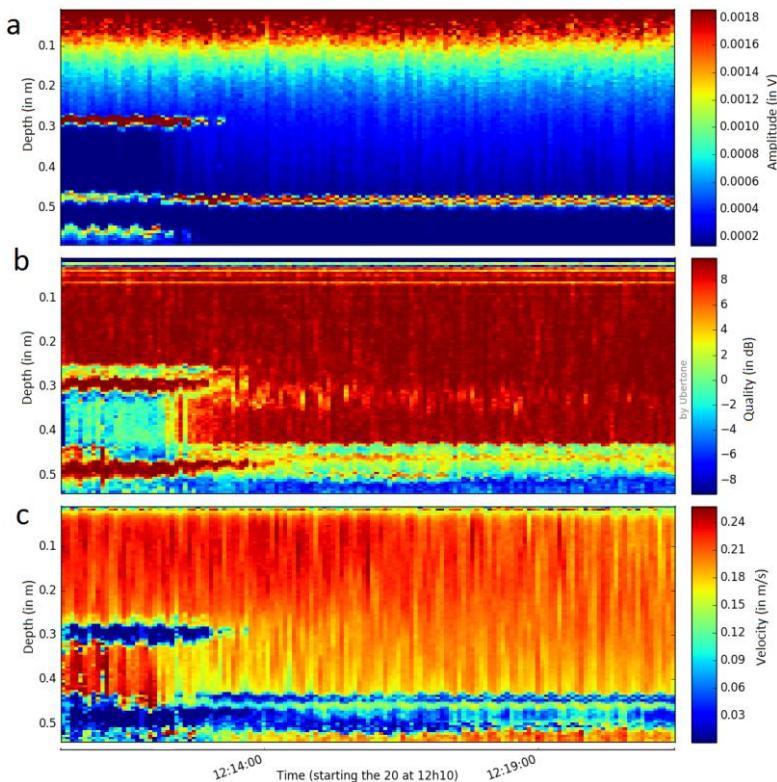


Figure 5. Evolution over time of the profiles of the echoes amplitude (a), of the SNR (b) and of the velocity (c) in the ICube Lab flume

In Fig. 5 – a, we can clearly identify the echoes amplitude peak of bottom of the flume. At the left side three peaks appear. The first is due to the surface of the  $20 \times 20\text{cm}$  step. The second is due to the main bottom wall. It can be seen because the step is filled with water. And the third is a second echo of the first peak. This kind of situation puts in difficulties the algorithm of bottom tracking.

Fig. 5 – b indicates a very good quality of the signal over almost the entire water depth ( $\text{SNR} > 6\text{-}8\text{dB}$ ).

## V MEASUREMENTS ON RIVER WITH THE MINI UVP HARDWARE

For the river measurements, three sets of configuration (see Table 4) have been used: one for the bottom tracking along the transect, another for the velocity profile on a fixed position and a last one for the velocity profiles through the transect. The bottom tracking and the velocity measurement over the transect were made simultaneously, moving on the 10m transect for 4 minutes. The position on the transect is here given by considering the manually crossing speed to be constant.

### V.1 BOTTOM TRACKING

The data analysis tool processed the amplitude data given by the first transducer ( $\beta=97^\circ$ ) to a color plot (see Fig. 6 – a). Each vertical is an echo amplitude profile. The bottom is characterised by a peak in the amplitude profile. An algorithm of level detection in the data analysis tool is able to give automatically the position of the river bottom providing an estimation of the river bed (see Fig 6 – b).

Table 4. Measurement settings for river measurements

	Bottom Tracking	Velocity Profile	Transect Velocity
Doppler angle [°]	97	65	65
$f_0$ [MHz]	1	1	1
PRF [Hz]	300	420	420
Min velocity [m/s]		-0.10	-0.03
Nyquist Range [m/s]		0.74	0.74
Number of cells	82	85	85
Position of 1 <sup>st</sup> cell [mm]	19.6	96.74	96.74
Cell thickness [mm]	20.0	20.02	20.02
Inter-cell distance [mm]	29.7	18.53	18.53
Nb of samples	50	128	128
Nb of profiles	10	10	10
Gain	20 dB	auto	auto

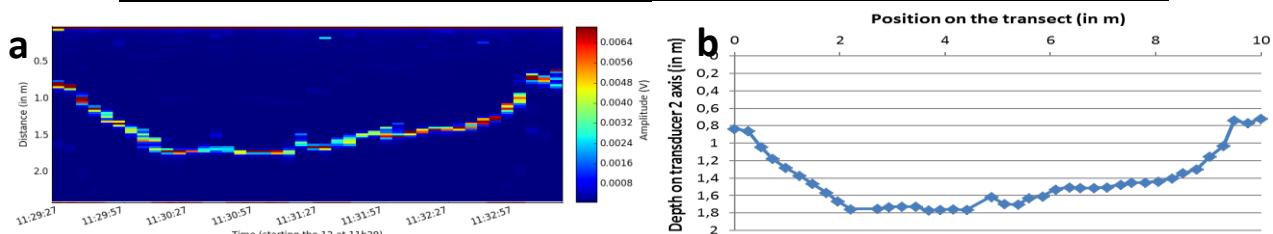


Figure 6. Amplitude profiles over the river (V) with the Mini UVP Hardware (a) and corresponding bottom tracking (b).

### V.2 VELOCITY PROFILE IN THE RIVER

The following measurement (Fig. 7) was done at a fixed position with the second transducer ( $\beta=65^\circ$ ) in the middle of the river, where the water level is 1.80 m high. The first 20 cm of the measured profile have been rejected because of ghost echoes. From there, the velocity decreases starting at a velocity of about 31cm/s in flow axis.

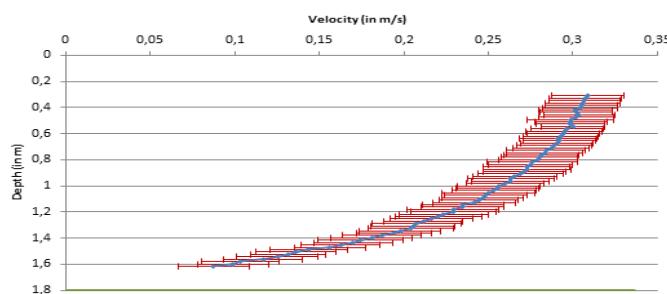


Figure 7. Average river velocity profile with corresponding standard deviation, measured at one given and fix position (approximatively the middle of the river) with the Mini UVP Hardware. The river bottom position is in green.

### V.3 MEAN VELOCITY OVER THE TRANSECT

When measuring the velocity by coherent Doppler method, the visibility may be limited by the presence of ghost echoes. In this case, it is possible to use phase coding and to apply a SNR filter to improve the velocity profile.

This filter was applied on the velocity data of the second transducer ( $\beta=65^\circ$ ) during the crossing of the transect (see Fig. 8 – a and b) and we obtained the evolution of the mean velocity when moving from one shore to the other (see Fig 8. c). Moreover, the values beneath the bottom given by the water level algorithm were suppressed. And as in paragraph IV.1, there is a blind zone at the bottom, so values in this area have also been removed.

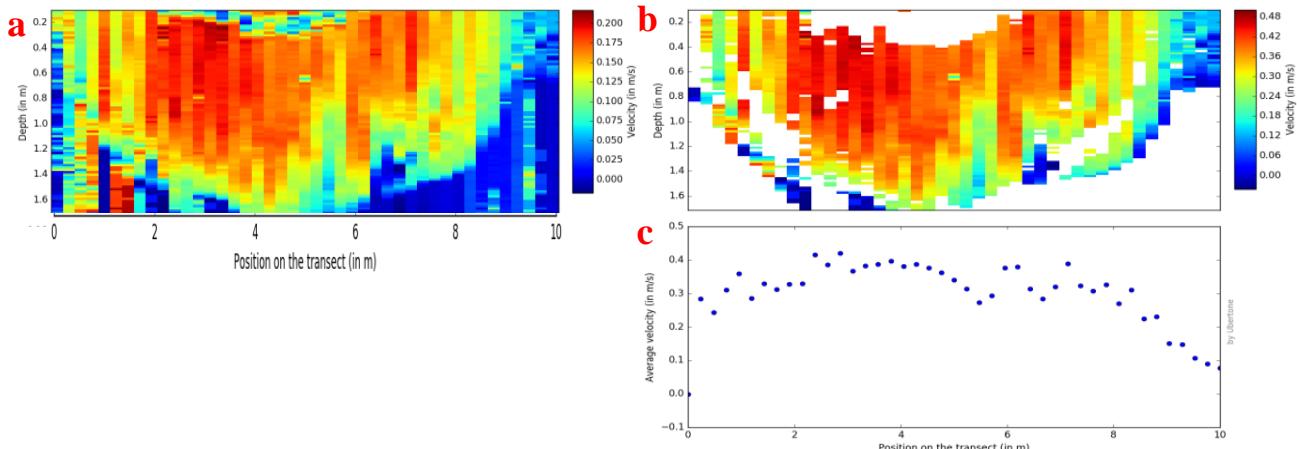


Figure 8. River raw (a), filtered (b) velocity profiles and mean filtered (c) velocity on flow axis, along the transect

## VI DISCUSSION

In Fig 2, we can notice, that in both cases we could measure with good quality almost down to the bottom of the flume. A blind zone at the bottom, which is due to the side lobes of the acoustic beam, appears in both cases. This blind zone makes the data collected in this area not reliable.

The fact that the transducer has to be in contact with the water is also to be considered because it influences the velocity profile in front of it: this is why the velocity seems also to tend towards 0m/s near the water surface.

As a validation of the measured velocity values, we also saw that those values, combined with the size of the flume section, give flow rates matching to those given by the flume command tool.

Fig. 5 – c shows the capability of the high time and spatial resolution. 141 mean profiles based on 10 instantaneous profiles each, and each instantaneous profile calculated with 128 samples for each profile cell, were measured in 11 minutes. Spatially, each profile was made of 100 cells with a resolution of about 6mm.

On Fig. 6 – b, when the algorithm does not find the bottom peak, the point is missing on the curve. Irregularities are due to the manually transect crossing. Moreover, the position on the transect is given approximatively. A precise bathymetry could be obtained by recording precisely the position of the board (with an external positioning system) and by taking into account the pitch and roll angles (given by the Mini UVP Hardware) in the post-processing of the data.

Fig. 7 shows a velocity profile for which the standard deviation is quite constant along the whole good quality profile depth. The velocity profile is obtained almost down to the river bottom, but not in the first 30cm. In the rejected 20 cm, the velocity could be obtained by changing the PRF, which shifts the ghost echoes, as seen in [Tezuka et al., 2006].

As for the configuration, it is important to pay attention to the Nyquist range, which is given by the PRF, and to the minimal measurable velocity to set. Here, the PRF of 420 Hz gives a range of 74 cm/s. Settings the minimal velocity to -10 cm/s in case of turbulences leads to a maximal measurable velocity of 64cm/s.

Knowing that the maximal velocity is around 31cm/s, we can say that this configuration leaves margin for turbulences and is therefore well suited.

The results presented in Fig. 8 – c could be improved. The filter is determined on the mean SNR profile of each mean velocity profile (one column on the color plots). Each profile is actually an average of 10 profiles. Thus, there are still some values that are not properly filtered as shown in the color plot in Fig 8. Filtering individually each of the 10 profiles with its corresponding SNR profile before averaging would enhance the result. Also, the board was moving with the waves and the pitch and roll angles have not been taken into account.

## VII CONCLUSIONS

With this new hardware development, we pushed further the technological limits of UVP to reach a lighter and smaller board. The electronics consume less and power up very quickly. It is equipped with two transmit/receive channels allowing to measure up to 100 cells in a profile. The communication protocol allows easy usage of the device. The main features remain: automatic gain control, static echo filter, phase coding, blind zone compensation, signal-to-noise ratio estimation.

The Miniature UVP Hardware shows results close to the devices already commercialized by Ubertone. These first measurements are promising for application in shallow waters, small rivers and open channels, especially when high resolution is required. The main limitation for this application is the range-velocity ambiguity which is inherent to the coherent Doppler method. To be able to see deeper in the river even with high velocities, other methods need to be explored, as those presented in [Franca, 2006]. The missing values due to ghost echoes could be measured by changing the PRF, which shifts the ghost echoes.

The specifications of this new UVP Hardware devised by Ubertone break new ground for a wide range of applications. Indeed, this 14g board will be embedded on a flying drone for flow measurement on rivers. This project is in partnership with LORIA, Pedon Environnement and Alerion and is co-funded by the European Union as part of the operational program “Feder-FSE Lorraine et massif des Vosges 2014-2020”.

The development of this new hardware has been funded by the Region Alsace.

## VIII REFERENCES

- Brumley B. H., Cabrera R. G., Deines K. L., Terray E. A. (1991) - Performance of a Broad-Band Acoustic Doppler Current Profiler, IEEE J. Oceanic Eng., 12:402-407.
- Fischer S. (2010) – A new high resolution velocity and acoustic turbidity profiler for open-channels, ISUD.
- Fischer S. (2012) – Evaluation of a High Resolution Acoustic Profiler for Hydraulic Erosion Studies, ICSE.
- Franca M. J. and Lemmin U. (2006) – Eliminating velocity aliasing in acoustic Doppler velocity profiler data, Measurement Science and Technology, 17:313-322.
- Hurther D. and Lemmin U. (2002) – A high-resolution 3-D acoustic Doppler profiling current Meter/Sediment Flux Profiler and its use in Laboratory and environmental studies.
- Kojima S., Tasaka Y., Murai Y., Takeda Y. (2006) - UVP Measurement for Flows Accompanying Free Surface, ISUD 5.
- Tezuka K., Mori M., Suzuki T., Kanamine T. (2006) – Application of Ultrasonic pulse-Doppler Flow meter for Hydraulic Power Plants, 5<sup>th</sup> ISUD Proceedings.
- Takeda Y. (1986) – Velocity profile measurement by ultrasonic Doppler shift method, International Journal of Heat and Fluid Flow, 7:313-318.